


FUNDAÇÃO 03

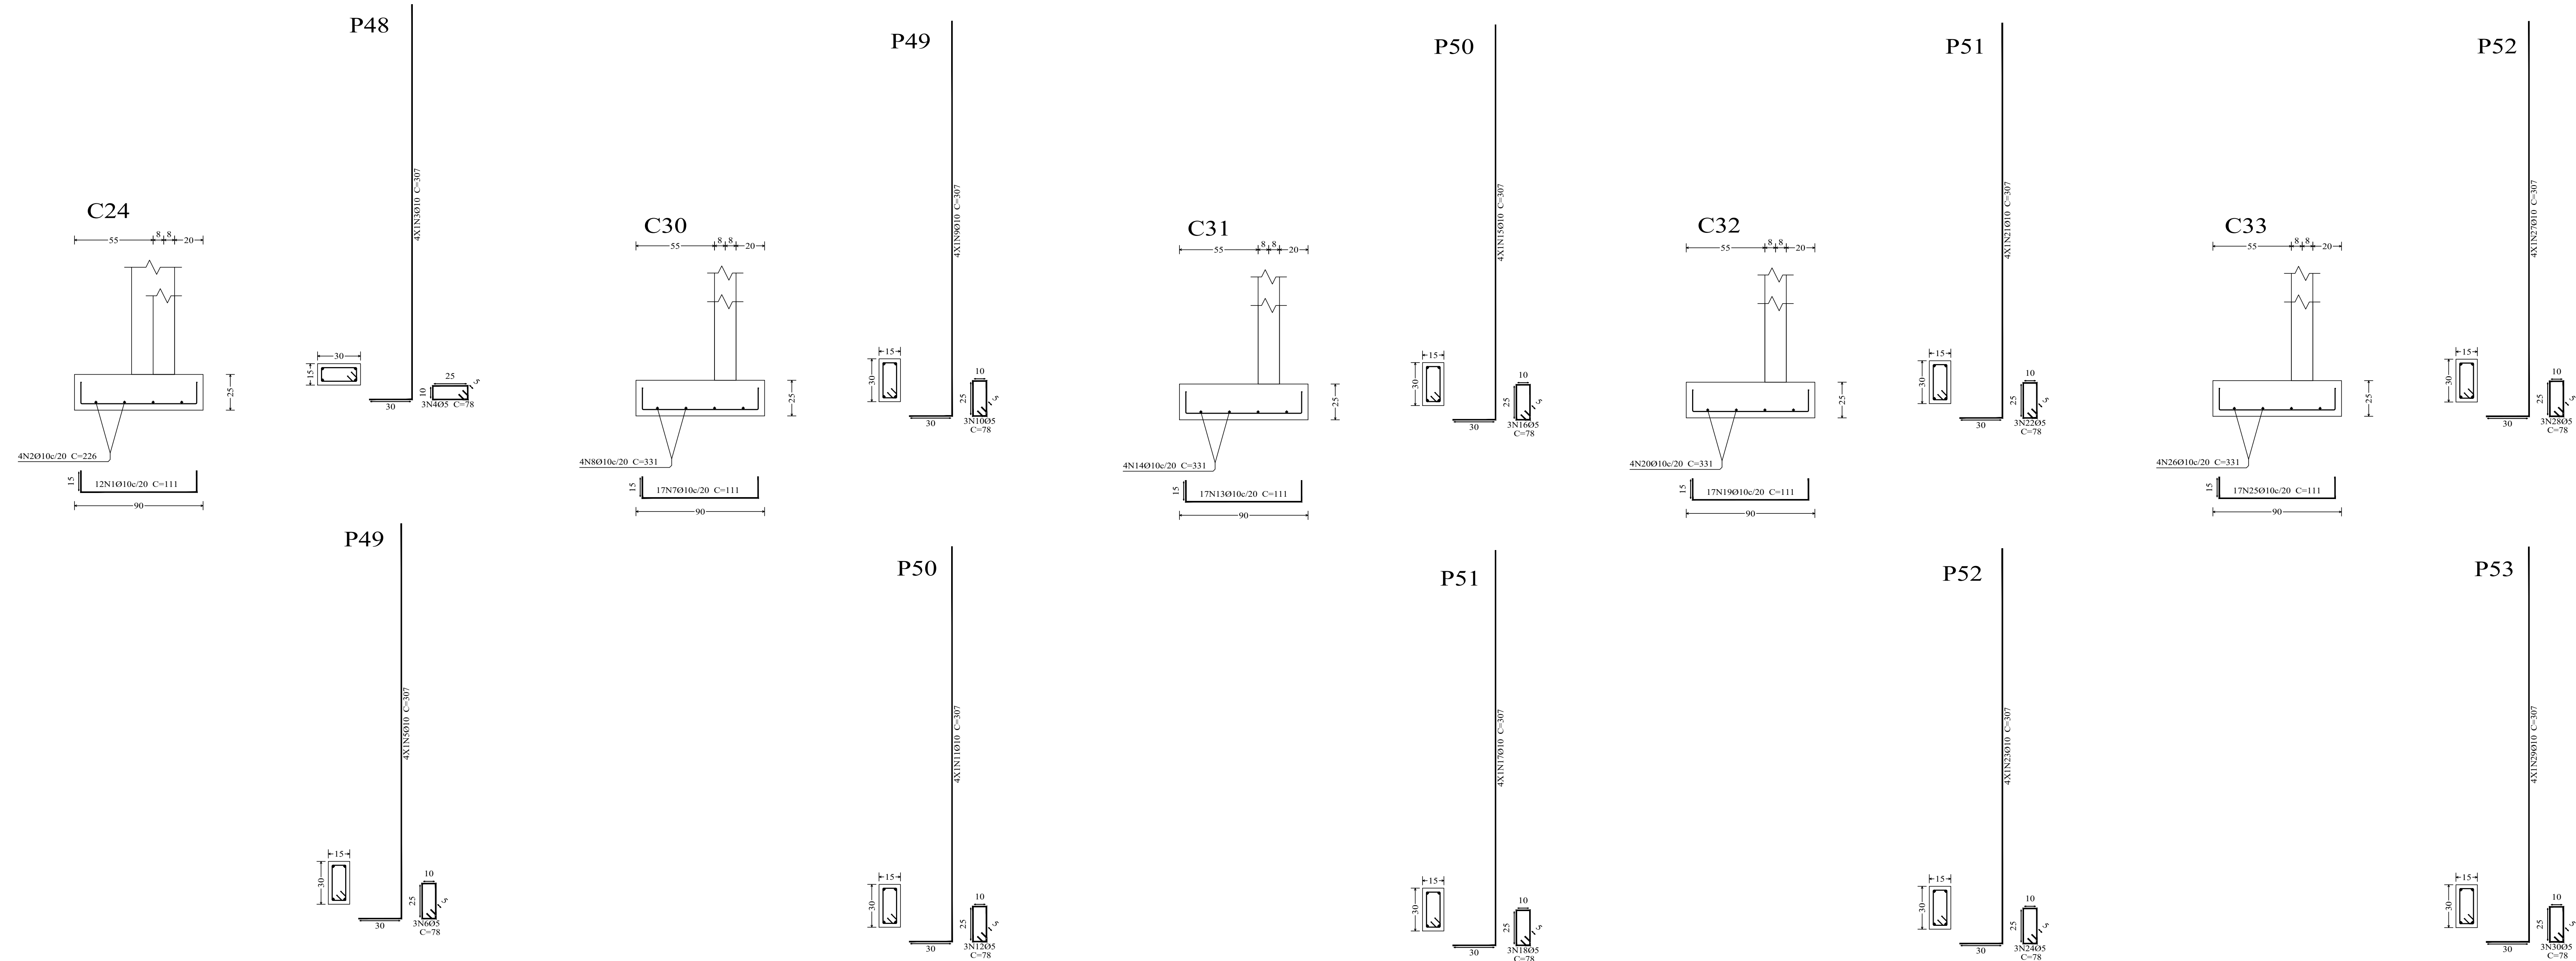

Elemento	Pos.	Diam.	Q.	Dob.	Rota	Dob.	Comp.	Total	CA-50	CA-60
				(cm)	(cm)	(cm)	(m)	(cm)	(kg)	(kg)
C24	1	Ø10	12	15	81	15	111	1332	8.2	
	2	Ø10	4		226		226	904	5.6	
	3	Ø10	4	30	277	307	307	1228	7.6	
	4	Ø5	3		78		78	234		0.4
	5	Ø10	4	30	277	307	307	1228	7.6	0.4
	6	Ø5	3		78		78	234		0.4
								Total:	29.0	0.4
C30	7	Ø10	17	15	81	15	111	1887	11.6	
	8	Ø10	4		331		331	1324	8.2	
	9	Ø10	4	30	277	307	307	1228	7.6	
	10	Ø5	3		78		78	234		0.4
	11	Ø10	4	30	277	307	307	1228	7.6	0.4
	12	Ø5	3		78		78	234		0.4
								Total:	35.0	0.8
C31	13	Ø10	17	15	81	15	111	1887	11.6	
	14	Ø10	4		331		331	1324	8.2	
	15	Ø10	4	30	277	307	307	1228	7.6	
	16	Ø5	3		78		78	234		0.4
	17	Ø10	4	30	277	307	307	1228	7.6	0.4
	18	Ø5	3		78		78	234		0.4
								Total:	35.0	0.8
C32	19	Ø10	17	15	81	15	111	1887	11.6	
	20	Ø10	4		331		331	1324	8.2	
	21	Ø10	4	30	277	307	307	1228	7.6	
	22	Ø5	3		78		78	234		0.4
	23	Ø10	4	30	277	307	307	1228	7.6	0.4
	24	Ø5	3		78		78	234		0.4
								Total:	35.0	0.8
C33	25	Ø10	17	15	81	15	111	1887	11.6	
	26	Ø10	4		331		331	1324	8.2	
	27	Ø10	4	30	277	307	307	1228	7.6	
	28	Ø5	3		78		78	234		0.4
	29	Ø10	4	30	277	307	307	1228	7.6	0.4
	30	Ø5	3		78		78	234		0.4
								Total:	35.0	0.8
								Ø5:	0.0	4.0
								Ø10:	169.0	0.0
								Total:	169.0	4.0